

TITLE: METHOD AND APPARATUS FOR BLIND SOURCE
SEPARATION USING TWO SENSORS
INVENTORS: Chang-kyu CHOI
SERIAL NO.: TO BE ASSIGNED
DOCKET NO.: 1793.1252

FIG. 1

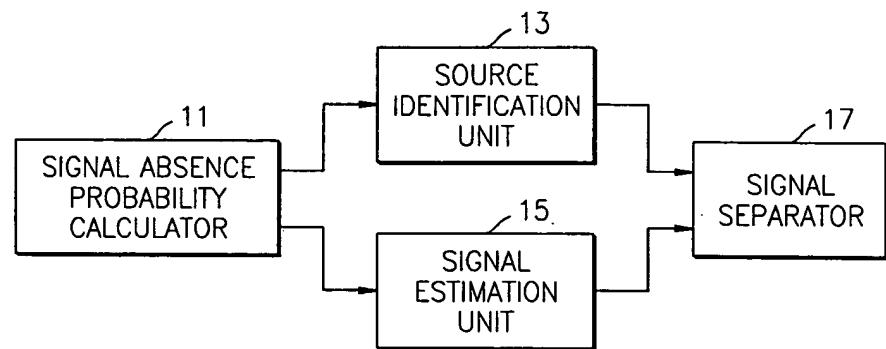


FIG. 2


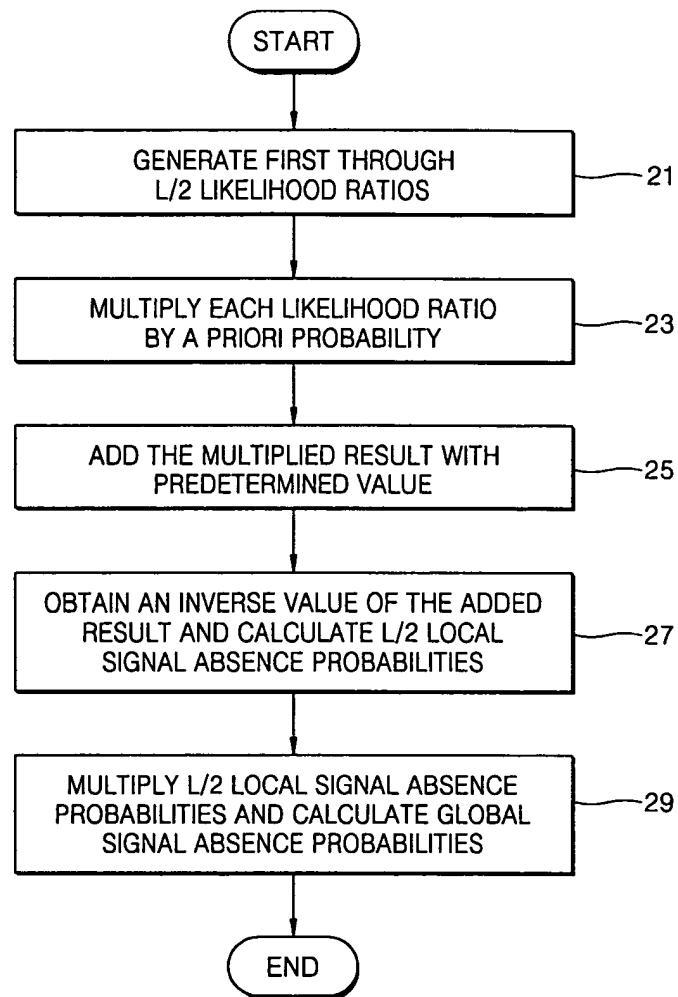


FIG. 3

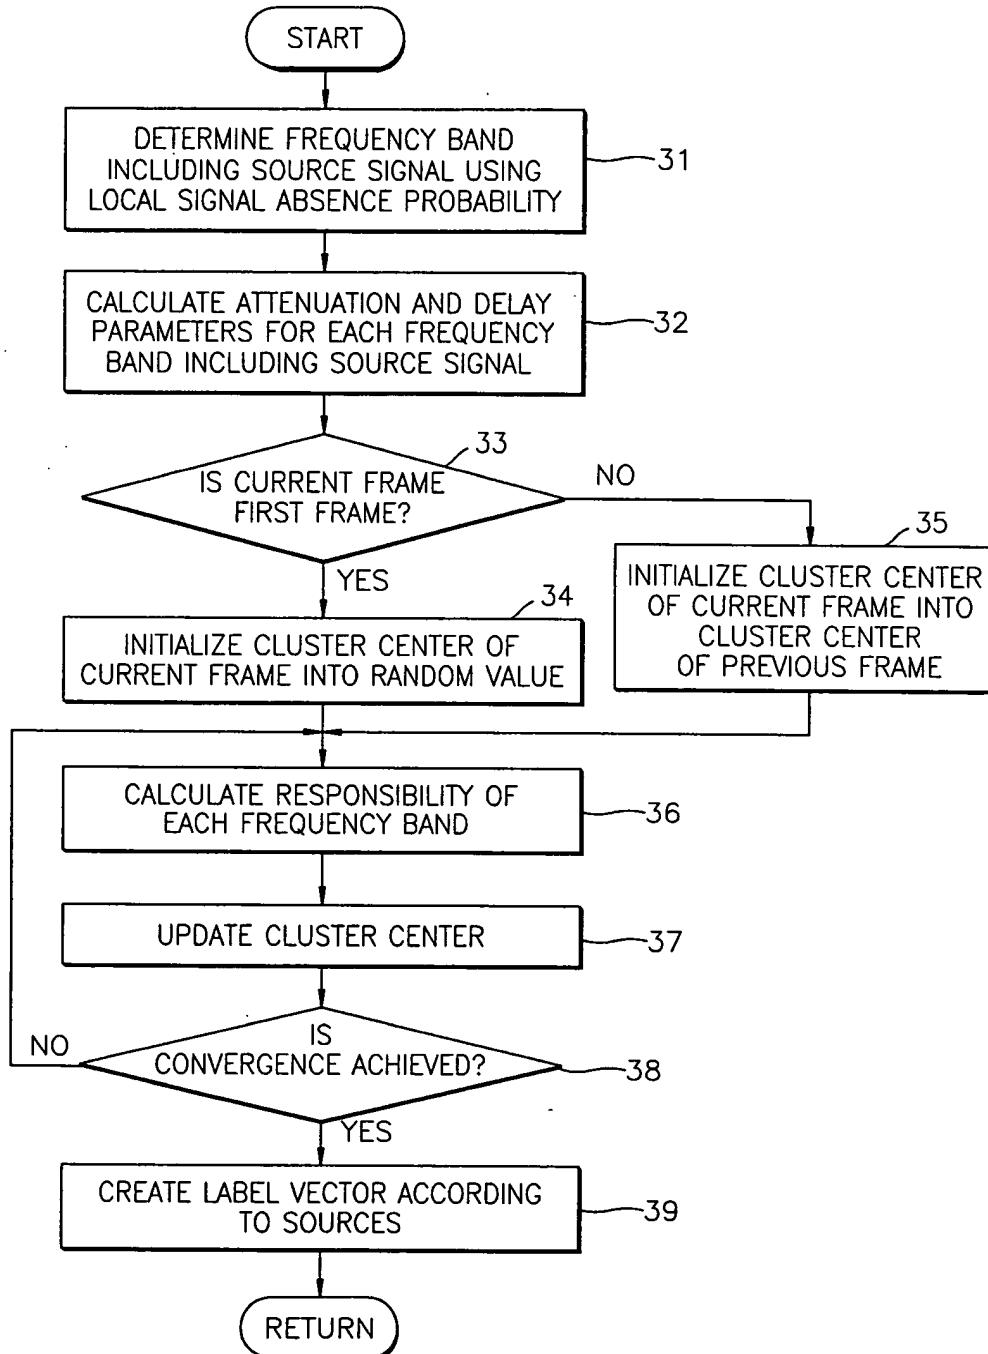

TITLE: METHOD AND APPARATUS FOR BLIND SOURCE
SEPARATION USING TWO SENSORS
INVENTORS: Chang-kyu CHOI
SERIAL NO.: TO BE ASSIGNED
DOCKET NO.: 1793.1252

FIG. 4A

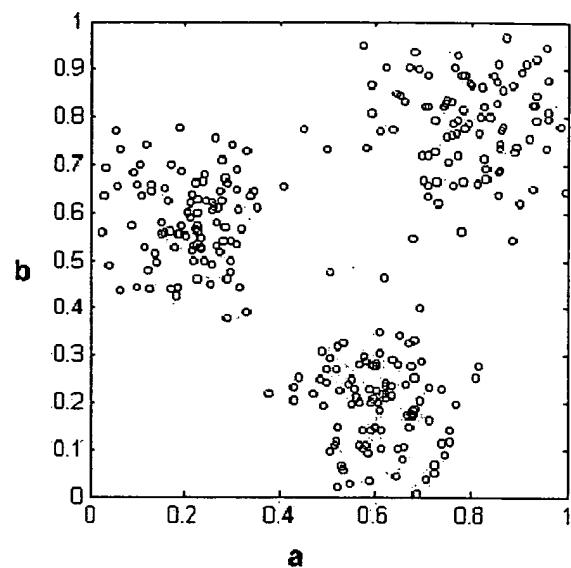


FIG. 4B

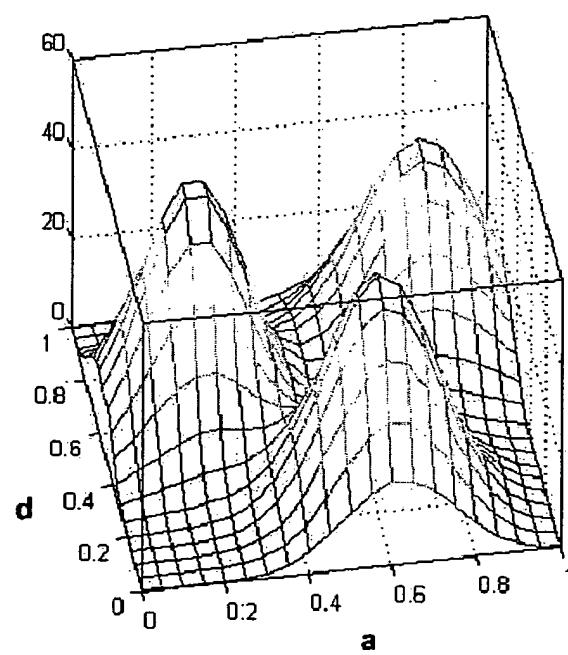


FIG. 5

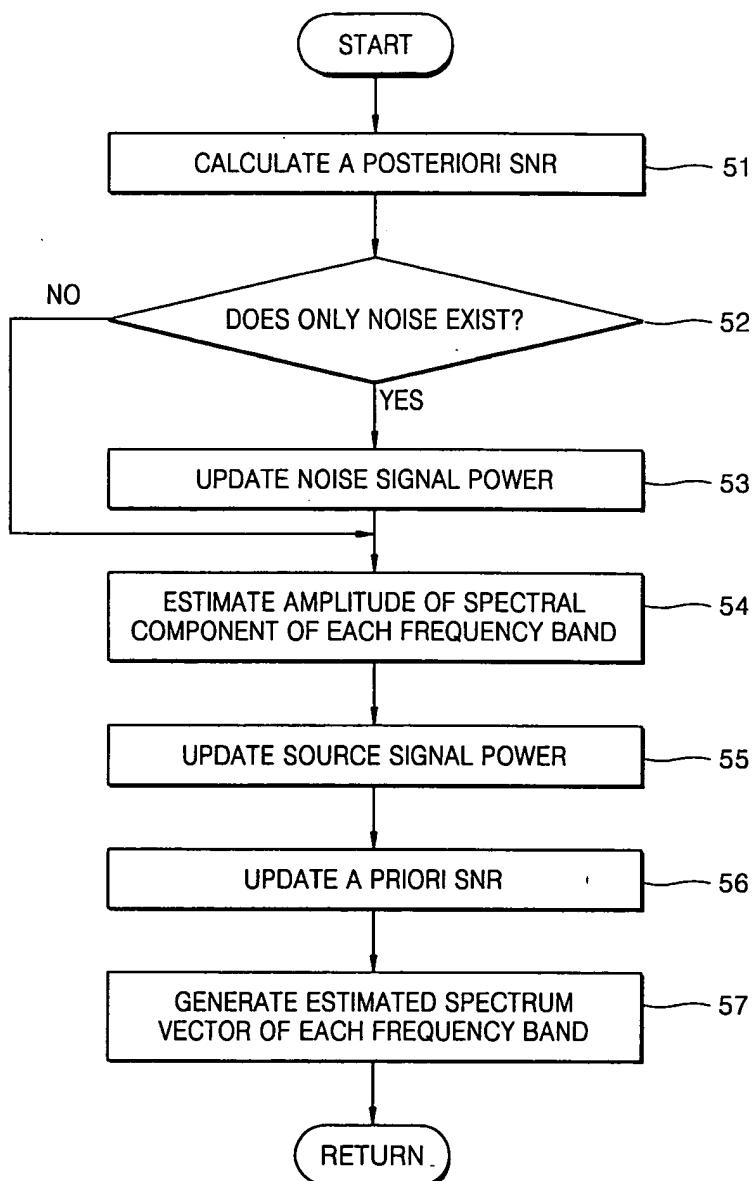


FIG. 6

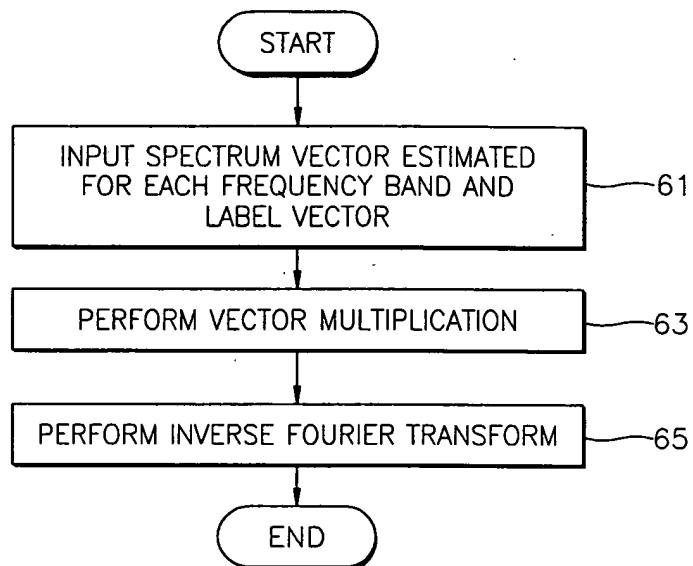


FIG. 7

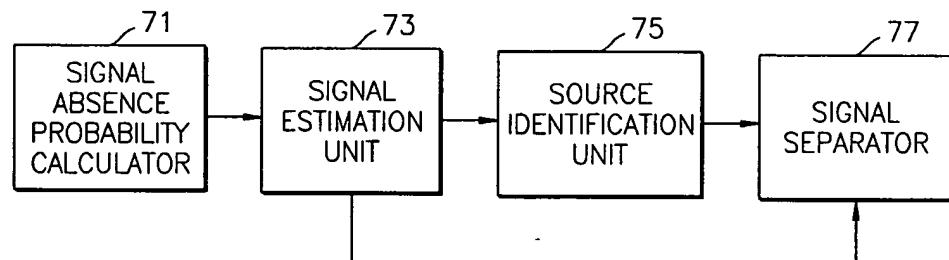


FIG. 8


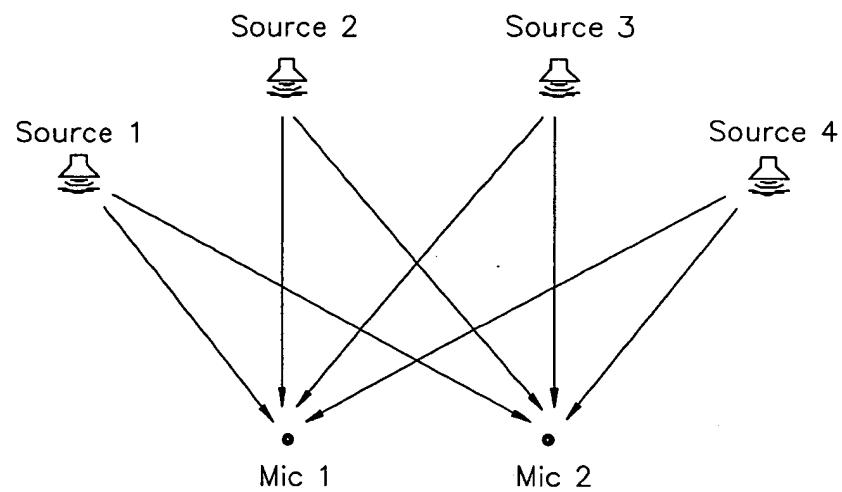


FIG. 9A

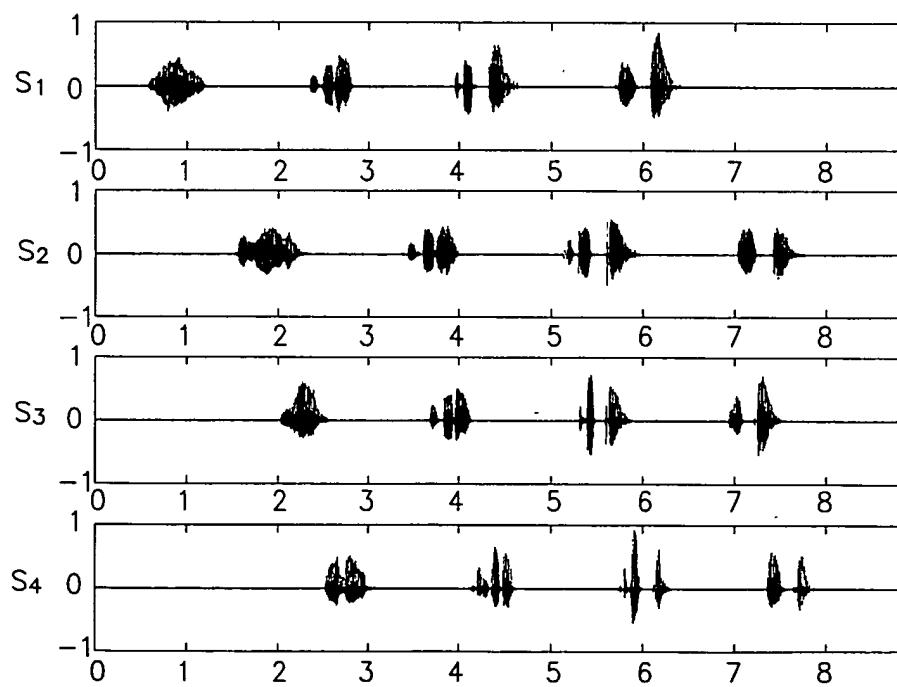

BEST AVAILABLE COPY

TITLE: METHOD AND APPARATUS FOR BLIND SOURCE
SEPARATION USING TWO SENSORS
INVENTORS: Chang-kyu CHOI
SERIAL NO.: TO BE ASSIGNED
DOCKET NO.: 1793.1252

FIG. 9B

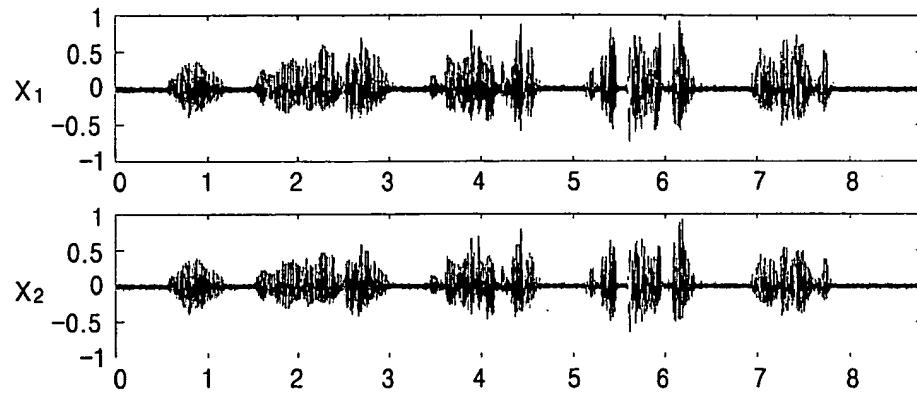


FIG. 9C

